



PolyVision PJ905 short throw projector for ēno® one

PJ905 specifications

- DLP with Brilliant Color technology
- Native resolution: WXGA (1280 x 800)
- Aspect ratio: 16:10 Native, 4:3
- Brightness: 2500 Lumens (typical); 2000 Lumens (eco mode)
- Lamp life: 3000/4000 hrs.
- 6-segment color wheel (RGBCWY)
- Contrast ratio: 2000:1
- Throw Ratio: 0.525
- Keystone correction: $\pm 15^\circ$
- 7 watt built-in speaker
- 3D-ready
- I/O connections: VGA (x2), HDMI, S-Video, Composite Video RCA, Audio RCA (R, L, Mono), Audio mini jack (in and out loop), VGA Monitor Out
- Control terminals: LAN Ethernet RJ45, USB, Serial RS-232
- Networks: IP for remote management
- Compatibility for video system: NTSC 4.43, PAL-N, PAL-M SECAM
- Compatibility for video interface: Composite, S-Video, Component YPbPr, Component YCbCr, VESA RGB
- Format compatibility: QVGA, VGA, SVGA, XGA, SXGA+, UXGA
- Acoustic noise: 34dB (typical 230 W); 29 dB (typical eco mode 190 W)
- Weight: 7.6 lbs (<3.45 kgs)
- Lamp replacement accessible when mounted
- Warranty: 3 years on projector; 3 years on lamp
- Kensington theft protection


- Power cord: 4.5m
- VGA cable: 4.5m
- USB cable: 4.5m
- Power requirements: 100V-240V, 50 / 60 Hz
- Power consumption: 290 W (normal use); <1 W (standby)
- Temperature: 5°C ~ 35°C; -10°C ~ 60°C (non-operating)
- Operating altitude: sea level to 10,000' at 23°C
- Humidity: 10% - 85% (no condensation); 5% - 95% (no condensation, non-operating)

For ēno one fixed wall arm configuration only

- Projector boom assembly: built-in breakaway plate safety mechanism
- Installs on stud/drywall, wood, brick, cinderblock or concrete wall
- Internal cable storage
- Paper template included
- Finish: black powdercoat
- Warranty: 5 years
- Shipping specs for fixed wall mount: 14" x 53" x 7"; 30 lbs.


Choose the PolyVision PJ905
short throw projector for an economical
ēno one projection solution.

ēno one height-adjustable mobile configuration

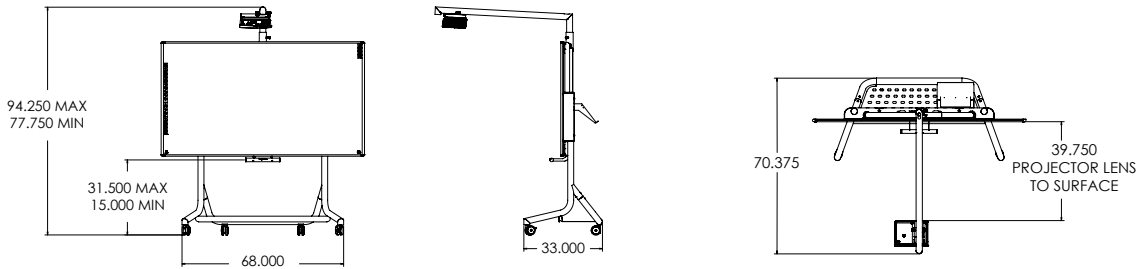


SKU	Interactive whiteboard	Projector	Mount	Total shipping weight
ENO ONE 2610 MOBILE	ēno 2610	PJ905	Height-adjustable carriage + Mobile Leg Kit	268 lbs.
ENO ONE 2810 MOBILE	ēno 2810	PJ905	Height-adjustable carriage + Mobile Leg Kit	293 lbs.

ēno one height-adjustable wall mount configuration

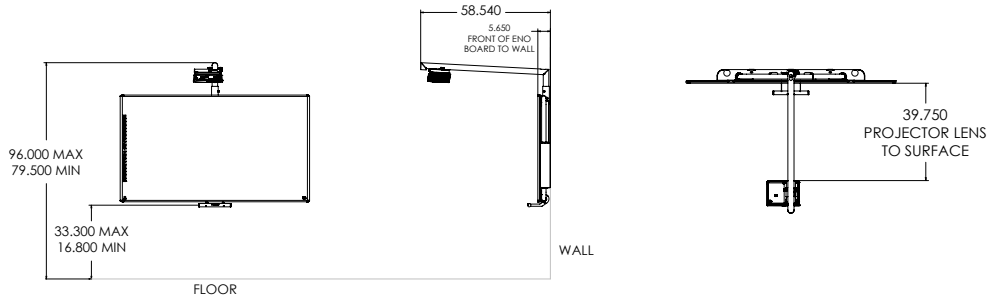

SKU	Interactive whiteboard	Projector	Mount	Total shipping weight
ENO ONE 2610 AWM	ēno 2610	PJ905	Height-adjustable	193 lbs.
ENO ONE 2810 AWM	ēno 2810	PJ905	Height-adjustable	218 lbs.

ēno one fixed wall arm configuration

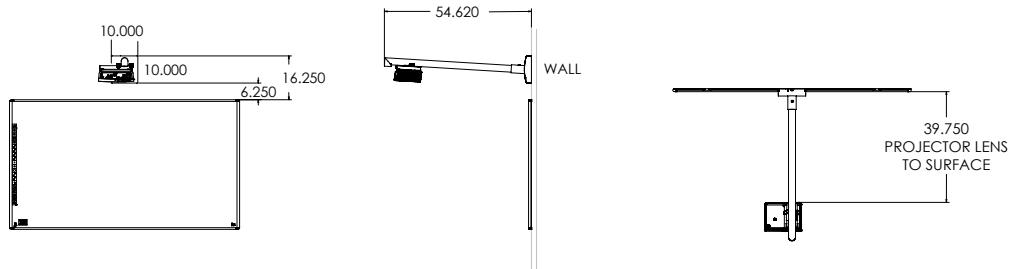

SKU	Interactive whiteboard	Projector	Mount	Total shipping weight
ENO ONE 2610 FWA	ēno 2610	PJ905	Fixed wall arm	112 lbs.
ENO ONE 2810 FWA	ēno 2810	PJ905	Fixed wall arm	137 lbs.
ENO ONE 2650 FWA	ēno click 2650	PJ905	Fixed wall arm	93 lbs.
ENO ONE 2850 FWA	ēno click 2850	PJ905	Fixed wall arm	110 lbs.

eVision™ PolyVision is committed to move toward sustainability in all areas of environmental stewardship—to protect people, replenish natural resources, and restore the communities in which we work and live.

©2011 PolyVision Corporation. All rights reserved. Trademarks used herein are the property of PolyVision Corporation or of their respective owners. PolyVision Corporation reserves the right to make changes in product design, construction or detail, and to discontinue any product or material without notice.

062311